




- DeviceNet slave protocol software helps you develop DeviceNet devices quickly and easily, and it supports all the communication mechanisms defined in the DeviceNet 2.0 specification, allowing developers to focus on the real world.

Application area :	DeviceNET 7/8-16UNF-(5 cores) automatics
Topology :	linear
Data transmission :	Up to 500 KBAud
Wiring standard :	IEC 61158 , IEC 61784-1 CPF 2/3
Network segment length :	Max imum 500m

信号指示	插拔式连接器			
	COMBICON	M12	7/8"	M8
CAN_L	2	5	5	5
CAN_H	4	4	4	3
V+	5	2	2	2
V-	1	3	3	4
Drain	3	1	1	1

信号指示、线路分配		信号
线芯颜色		
蓝色		CAN_L
白色		CAN_H
红色		V+
黑色		V-
屏蔽针脚		

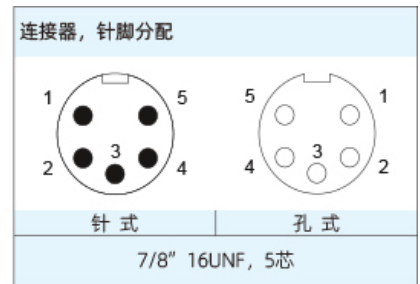



Ordering products

Choose the model format for example :



Data Download

Product Catalog	CAZN-M-SERIE-CONNECTOR 、 CAZN-Industrial-Ethernet-connector
EMC	EMC Certificate
RoHS	RoHS Certificate