


- Cable collet and nut for fitting a bend relief




TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

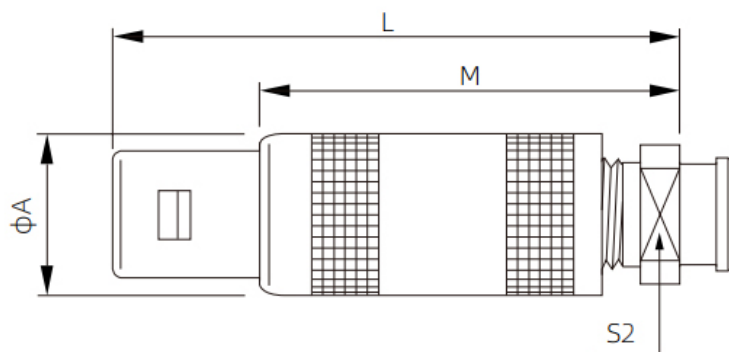

编号(Model)		尺寸(Size)			
型号(Type)	系列(Series)	A	L	M	S2
FFA	0S	9.0	34.5	24.5	7.0
FFA	1S	12.0	42.5	31.5	9.0

Ordering products

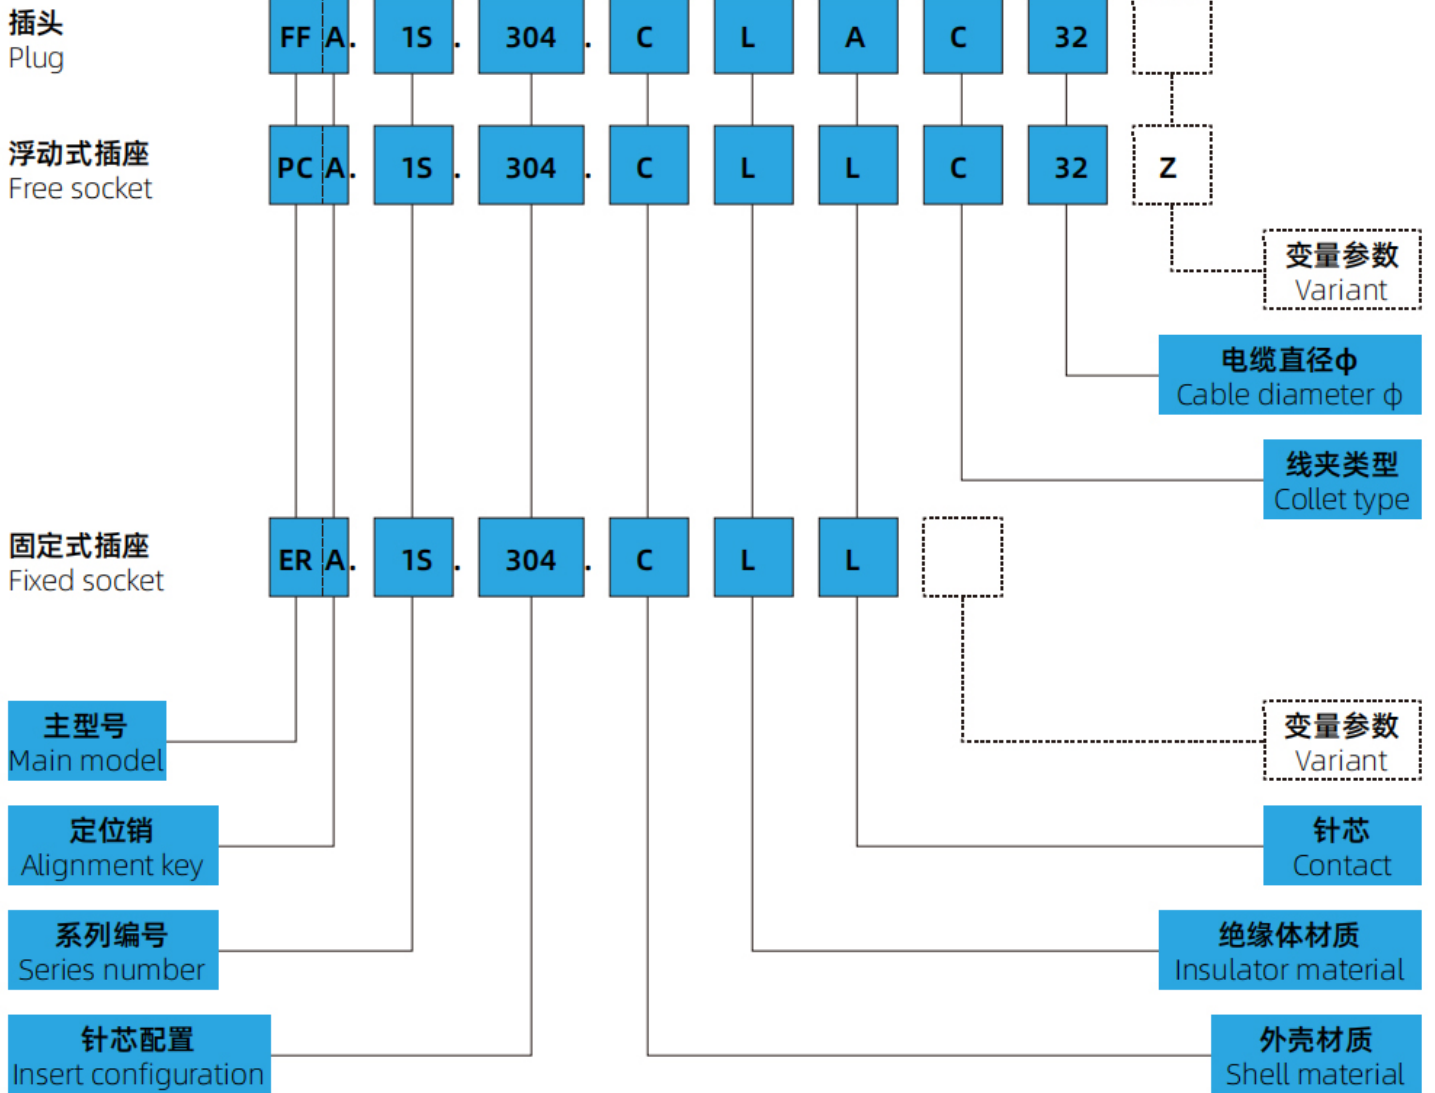

2D Download	
3D Download	

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
---------------------------------	--