




■ Nut fixed

### TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

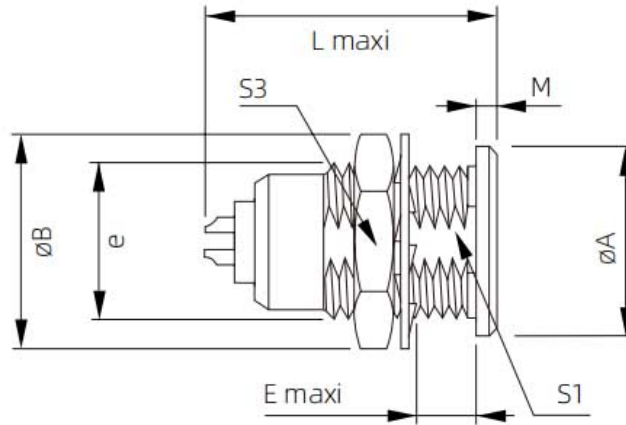

注：<sup>1)</sup>单芯型号。

编号(Model)		尺寸(Size)								
型号(Type)	系列(Series)	A	B	e	E	L	L <sup>1)</sup>	M	S1	S3
ERA	05	10	12.4	M9x0.6	7.0	17.5	18.0	1.2	8.2	11
ERA	15	14	15.8	M12x1.0	7.5	42.0	20.5	1.5	10.5	14

## Ordering products



2D Download	
3D Download	

## Data Download

Product Catalog	<a href="#">CAZN-Push Pull Series Brochure</a>
-----------------	--