




- Nut fixed

TECHNICAL PARAMETER


Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

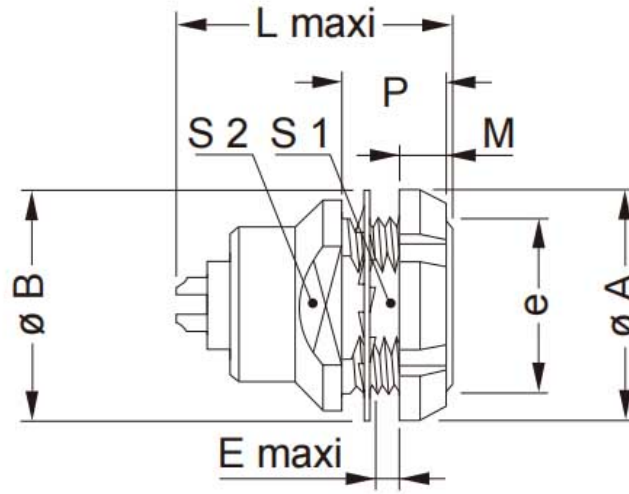

注：¹⁾单芯型号。

编号(Model)		尺寸(Size)									
型号(Type)	系列(Series)	A	B	e	E	L	L ¹⁾	M	P	S1	S2
EEP	1S	16	16.0	M12x1.0	6.5	20.2	20.5	3.5	11	10.5	13
EEP	2S	20	19.5	M15x1.0	4.3	24.5	23.5	3.5	9	13.5	15

Ordering products

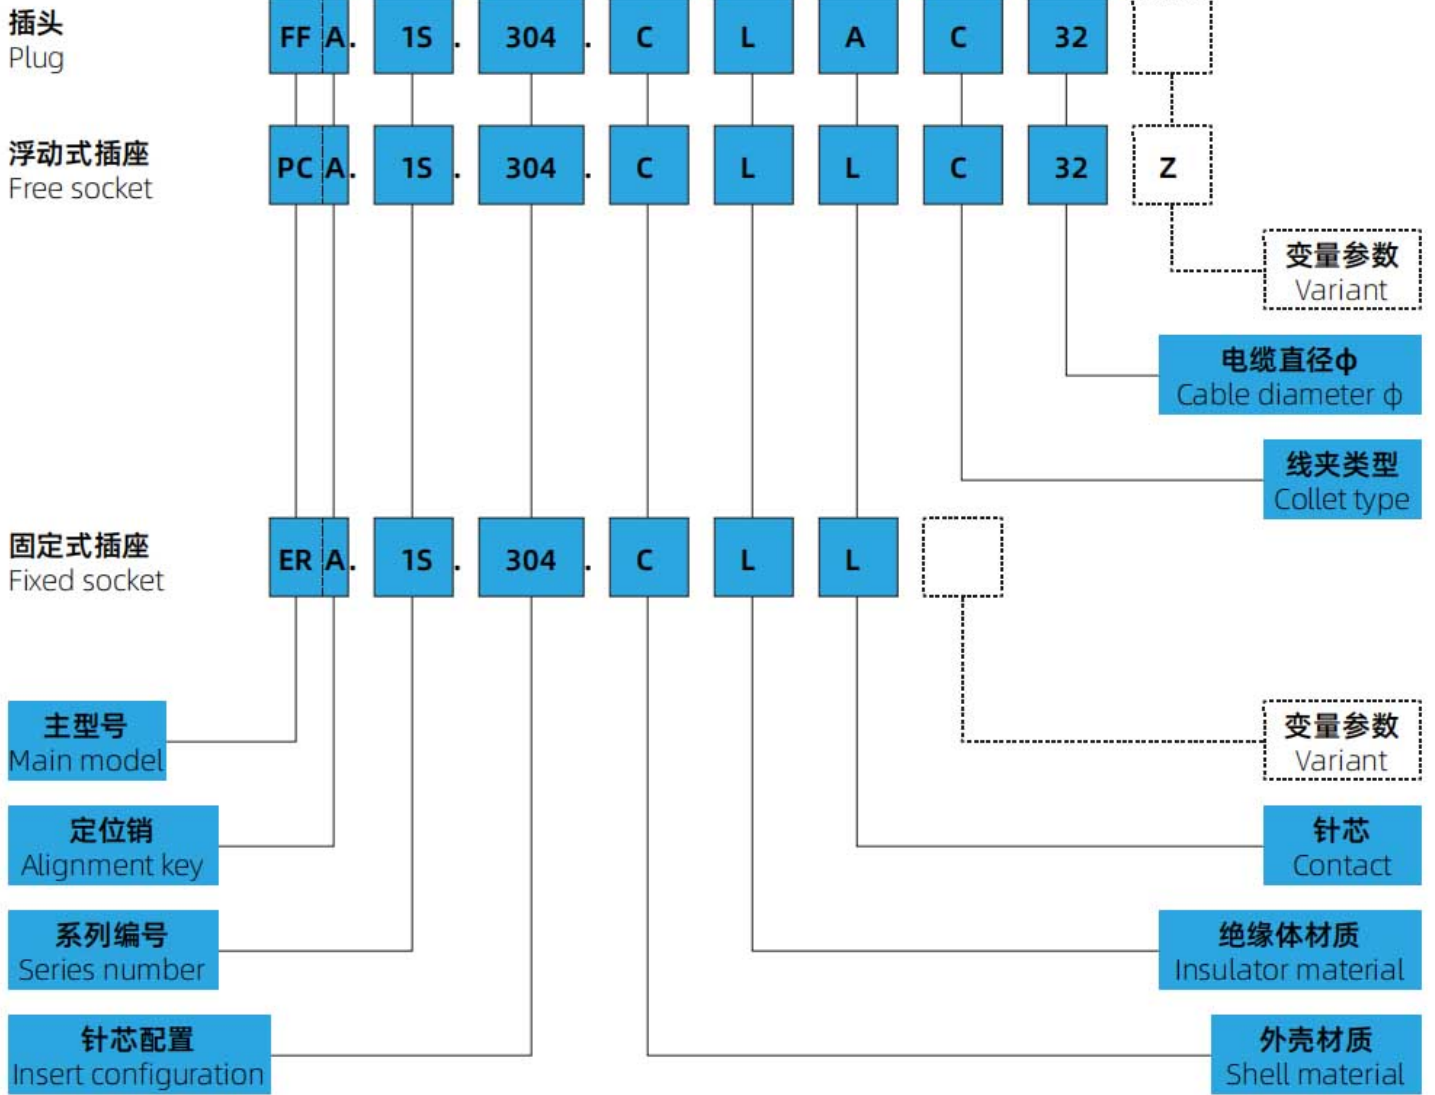

2D Download	
3D Download	

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
---------------------------------	--