


- key (G) or keys (A、 B、 C、 H or J), Double nut plate rear mount




#### TECHNICAL PARAMETER


Coupling:	Push-pull self-locking
Operating temperature:	-50°C ~ +120°C
Maximum humidity:	Up to 95% at 60°C/140°F
Underwater use depth:	0~100M
Salt spray test:	> 96h
Impact resistance:	100g,6ms
Mechanical life:	> 1000 cycles
Protection level:	IP50、 IP64



焊接+压接  
(Solder + Crimp)

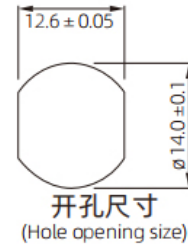


开孔尺寸  
(Hole opening size)

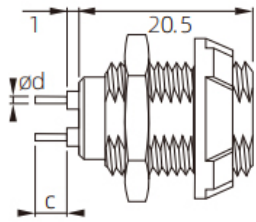

印制板  
(Print)

型号 (Part Number)	芯数 (Number of contacts)	插针(Contact)					
		焊接(Solder)		压接(Crimp)		印制板(Print)	
		N	a max	N	a	c	φd
PKG.M0.2GL.LG	2	20.5	2.5	22.2	0	5	0.7
PKG.M0.4GL.LG	4	20.5	2.5	22.2	0	5	0.7
PKG.M0.5GL.LG	5	20.5	2.5	22.2	0	5	0.7
PKG.M0.6GL.LG	6	20.5	2.5	22.2	0	3	0.5
PKG.M0.7GL.LG	7	20.5	4.5	22.2	0	3	0.5
PKG.M0.8GL.LG	8	20.5	4.5	22.2	0	3	0.5
PKG.M0.9GL.LG	9	20.5	3.9	-	-	3	0.5
PKG.M1.0GL.LG	10	20.5	3.9	-	-	3	0.5

Ordering products

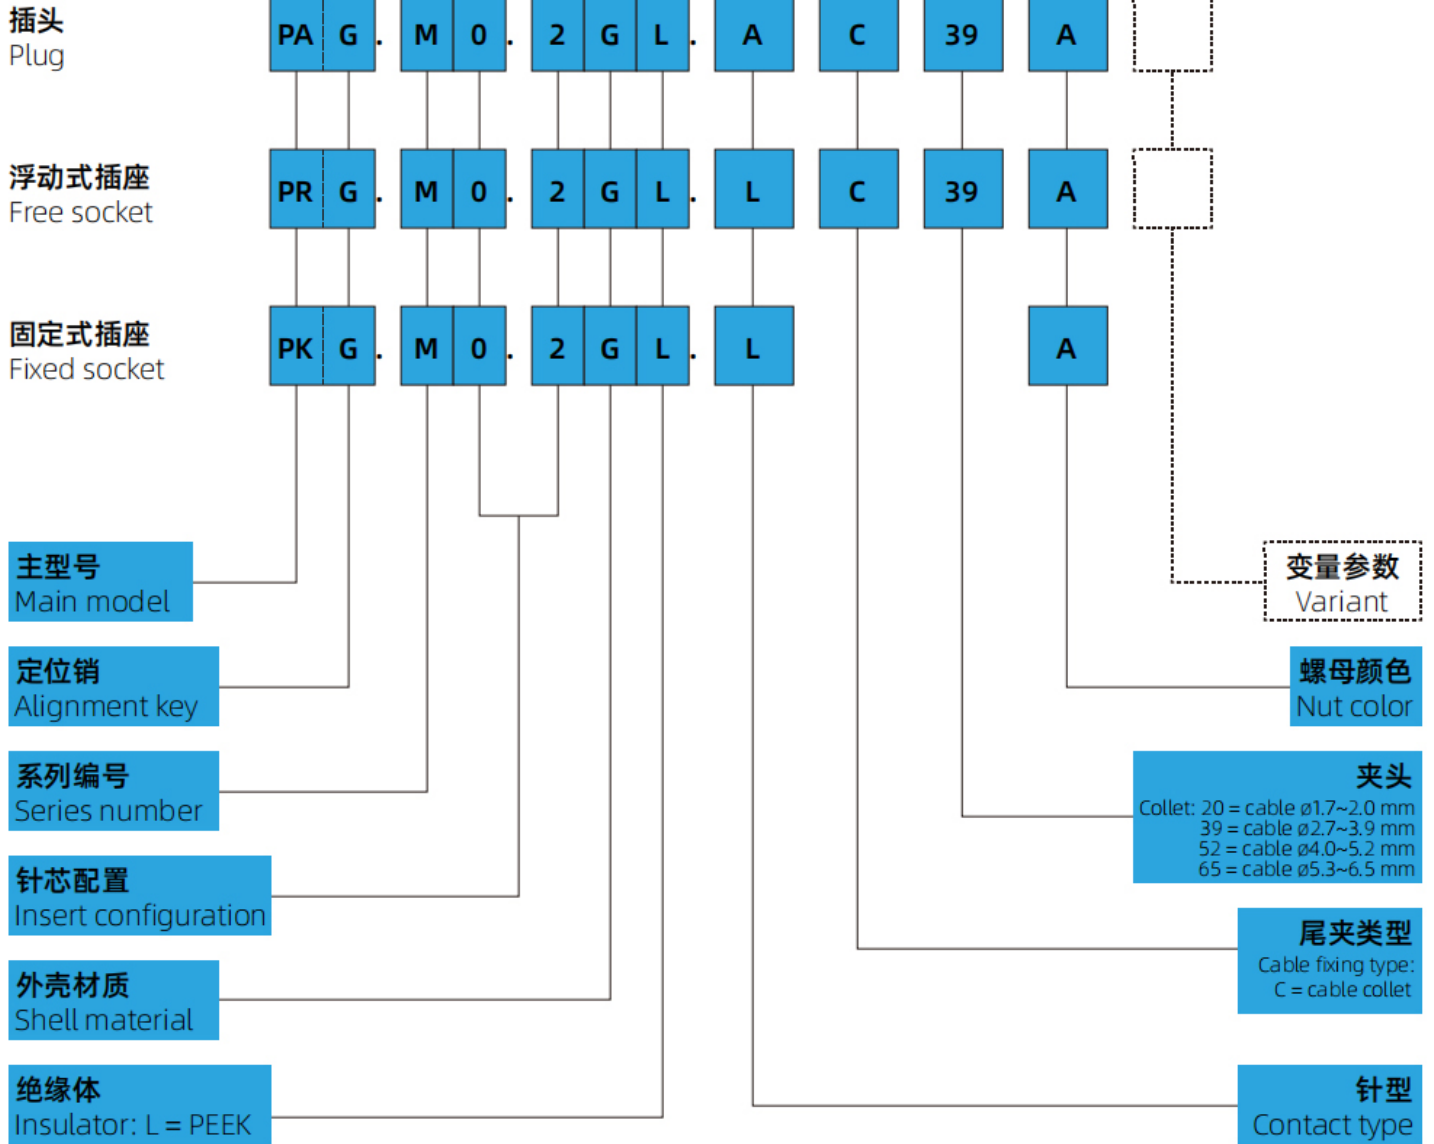

<a href="#">2D Download</a>	
<a href="#">3D Download</a>	

## Data Download

<a href="#">Product Catalog</a>	<a href="#">CAZN-Push Pull Series Brochure</a>
---------------------------------	--