

EP-TYPE-C Panel front installation female socket/Male straight plug(Threaded)



- Plastic waterproof connector EP panel series,
- Structure type: Female socket installed in front of panel type board,
- Pin type: hole type,
- Connection method: welding type,
- Chip count: USB 2.0, 3.0, 3.1, 4.0,
- Shielding: customizable,
- Certification: CE RoHS,


MECHANICAL PARAMETER

Shell material:	Thermoplastic plastic PA66, flame retardant grade: V-0
Contact material:	Brass/Phosphor copper gold-plated
Sealing material:	Epoxy resin/rubber
Coupling:	Thread (T)
Termination Way:	Solder
Contact impedance:	$\leq 5m\Omega$
Durability:	≥ 500 (Cycles)
Insulation resistance:	$\geq 100m\Omega$
Applicable temperature:	-40°C ~ +105°C
Waterproof grade:	IP67 , IP68
Cable material:	PVC Jacket
Rated current:	1~3A
Rated voltage:	5~20V

EP-TYPE-C Panel front installation female socket/Male straight plug(Threaded)



DIMENSIONS

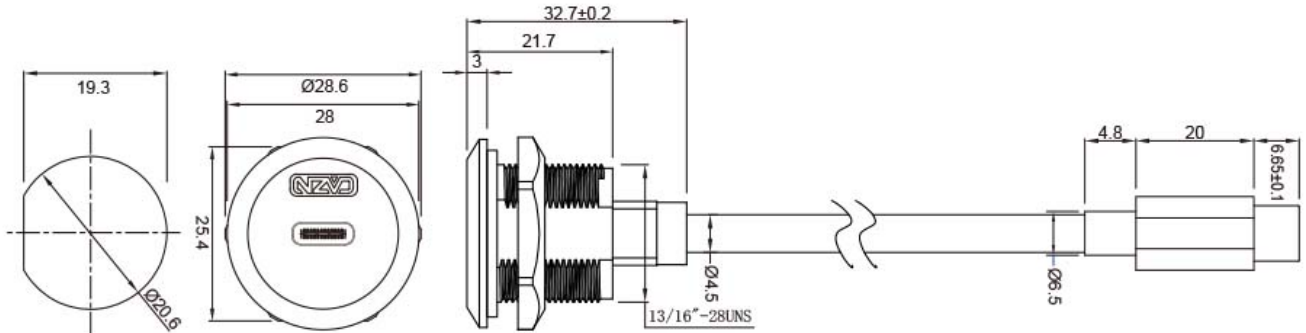

产品开孔尺寸
hole opening size

Ordering products

Product Name	Pins	Model-Shielded	Model-Unshielded	3D Download	2D Download
EP-TYPE-C Panel front installation female socket/ Male straight plug(Threaded)-xxM-PVC	USB2.0	EP-FT2-PWF/MT2-NWA-xxPV-S	EP-FT2-PWF/MT2-NWA-xxPV		
EP-TYPE-C Panel front installation female socket/ Male straight plug(Threaded)-xxM-PVC	USB3.0	EP-FT3-PWF/MT3-NWA-xxPV-S	EP-FT3-PWF/MT3-NWA-xxPV		↓
EP-TYPE-C Panel front installation female socket/ Male straight plug(Threaded)-xxM-PVC	USB3.1	EP-FT3.1-PWF/MT3.1-NWA-xxPV-S	EP-FT3.1-PWF/MT3.1-NWA-xxPV		↓
EP-TYPE-C Panel front installation female socket/ Male straight plug(Threaded)-xxM-PVC	USB4.0	EP-FT4-PWF/MT4-NWA-xxPV-S	EP-FT4-PWF/MT4-NWA-xxPV		

*If you need to choose other wire, please consult customer service.

Data Download

Product Catalog	CAZN-Plastic Waterproof Connector brochures
EMC	EMC Report 、 EMCReport 、 REACH233Report
RoHS	Certificate 、 Report
Waterproof test report	Certificate 、 Report