




Contact

Material :	铜合金 Copper Alloy
Surface :	镀金 Hard-gold Plated / 镀银 Hard-silver Plated
Contact resistance:	$\leq 3\text{m}\Omega$
Crimp terminal	
Wire guage :	0.14-2.5mm ²
AWG :	26-14
PE screw terminal	快速锁定终止 Quick Lock Termination
Wire guage :	0.5-2.5mm ²
AWG :	20-14

Dimension

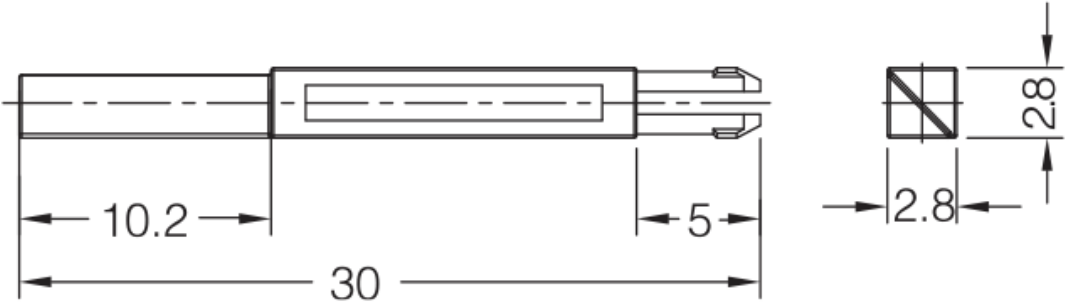

Ordering products

Model	Description	3D Download	2D Download
CODE-Q12	Coding Element Coding、 Pokayoke Male		