




- Model: SMA-J-7
- Frequency: DC0~6Ghz
- Salt Spary: 48H (customized for special needs)
- Application: Products are widely used in base stations, antennas, telecommunications, meters, PC/LAN, IOT, smart home, automation equipment and other fields.

Connector Type :	SMA-J Male Plug
Impedance :	50 Ohms
Polarity :	Standard
Connector Coupling :	Threaded
Termination Way :	Solder
Orientation :	Straight
Material :	Nickel-plated copper
Contact Material :	Gold-plated copper
Insulation :	PTFE
Frequency Range :	DC0~6Ghz
Insertion Loss :	0.15dB
VSWR :	≤1.2@DC-6G
Operating Temperature Range :	-40°C ~ +165°C
2022/95/EC(RoHS) :	Conform

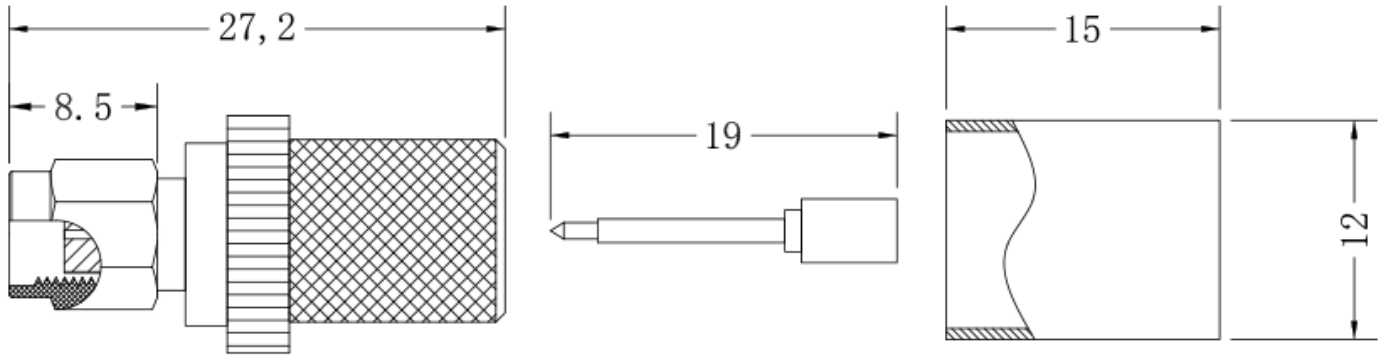

**SMA-J-7**  
1.01.0010